



低压差分探头DP-60HS



性能参数参考	
型号(Model)	DP-60HS
频宽(Bandwidth) (-3dB)	DC-60MHz (x10档) DC-50MHz (x5档) DC-15MHz (x1档)
衰减比例 (Attenuation Ratio)	x1, x5, x10
上升时间(Rise time)	5.8ns (x10档) 7ns (x5档) 23ns (x1档)
精度 (Accuracy)	±2% (热机20分钟后)
输入电压范围 (Input voltage range)	x1时 ≤7Vp-p
	x5时 ≤36Vp-p
	x10时 ≤70Vp-p
最大输入电压(Input Vp-p)	70V
杂讯 (Noise)	≤1.0mV rms
输入阻抗 (Impedance)	1MΩ // 2.5pF (两端之间)
最大消耗 (Maximum consumption)	9V/35mA
工作温度 (Working Temperature)	0-50℃
工作湿度 (Working Humidity)	10-85%RH
重量 (Weight)	250g
尺寸 Size (LxWxH)	195x55x30mm

●DP-60HS, 70Vp-p, 输入阻抗 $1\text{M}\Omega // 2.5\text{pF}$, 衰减器x1, x5, x10根据不同量程选择测试, BNC接口可兼容任何品牌示波器使用。

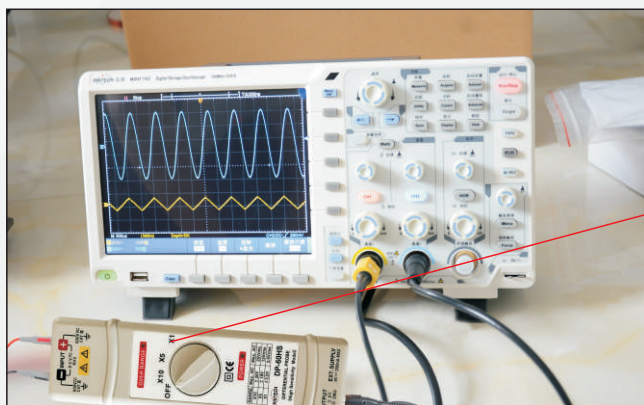


冬 一

- 分离式设计，便捷携带。



图二

- 有源差分探头可将任意间的两点浮接信号，转换成对地的信号，以供示波器、电表、或计算机使用，应用于大多数电路测试领域，尤其是电机电路测试。

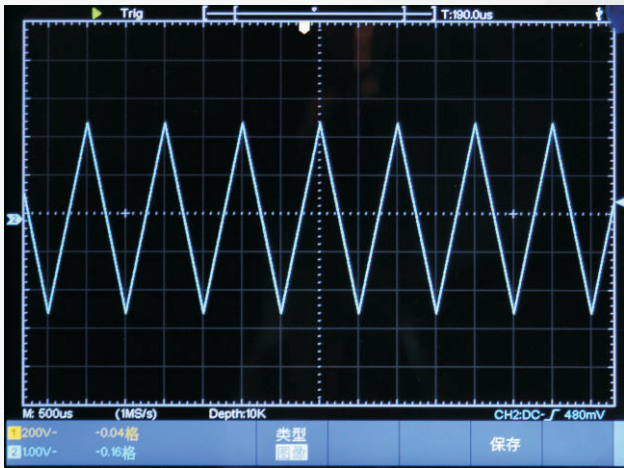

图三


●应用

强电或高压隔离测量
电源转换等相关设计
焊接、电镀电源
变频家电
电机驱动设计
CRT显示器设计
低压电器试验

●配件



适配器



探钩



BP-276N



BP-250



BP-356N

